




CBT380

Mobile conveyor
for advertising print applications

printing (not only) promotial items

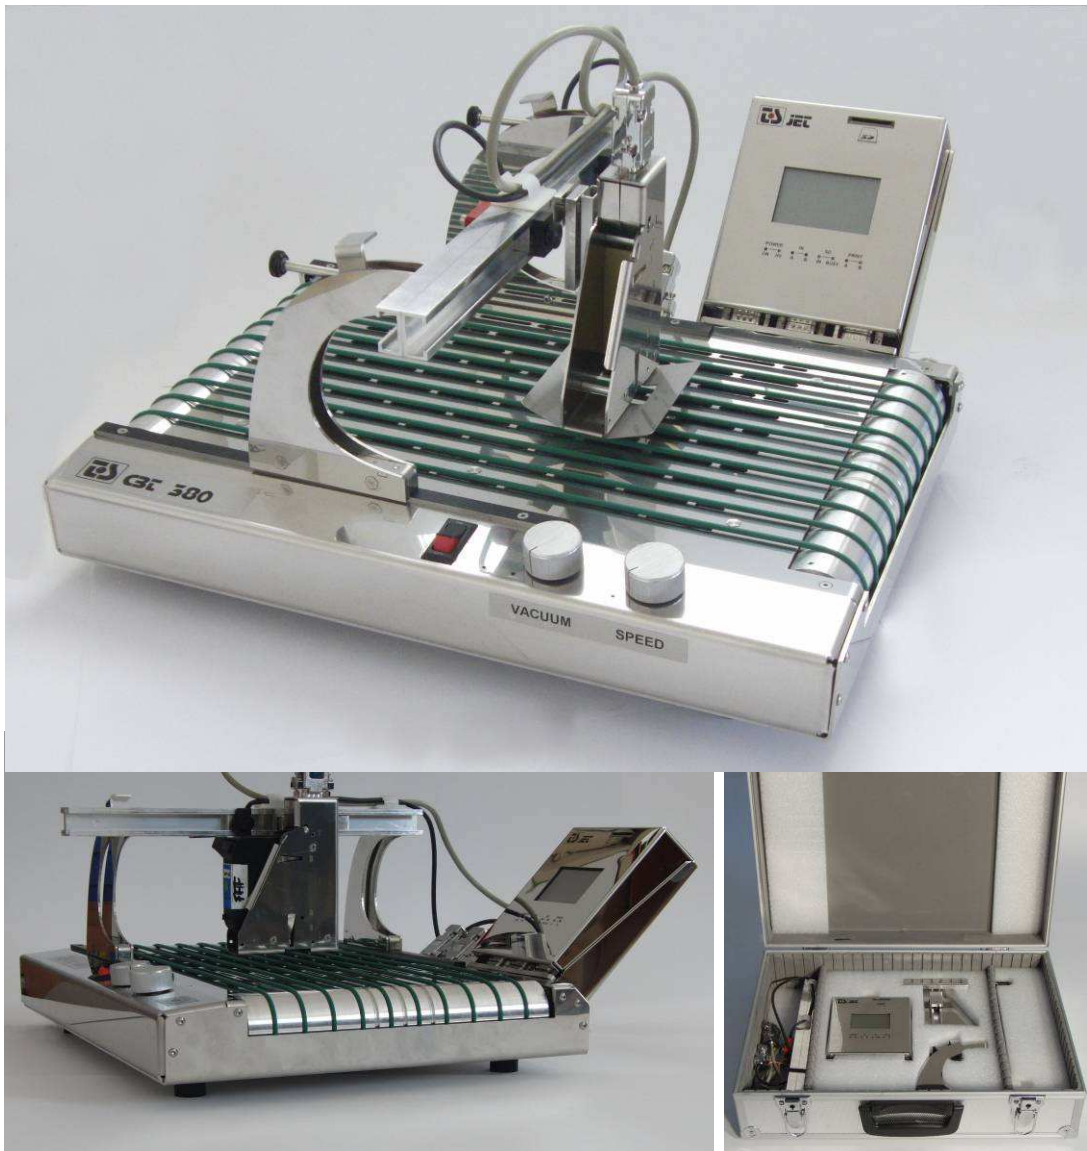

Mobile conveyor for advertising print applications CBT380



basic technical specifications:

- Conveyor speed 0,5 to 30 m / min
- Conveyor clear width 210 mm
- Conveyor clear height under ramp 90 mm
- Clear height under print head 70 mm
- Holding patterns by vacuum (regulated)
- Softstart yes

- Number of print heads up to 2 simultaneously

- Control regulators for speed and vacuum control

- Printing system interface **TSjet** (integrated holder with connectors)

- Print control integrated electronic encoder

- Power supply 24 V DC, 25 VA, or 12V DC, 25 VA

- Dimensions 430 x 310 x 200 mm (70 mm without ramp)
- Weight cca 5 kg
- Operating temperature range 0 to +50 degrees Celsius

Can be mounted and dismantled in few seconds.

Fully mobile application - operation possible also from 12V power supply in Your car.

All parts fits in it's place in the carrying case.

Simple construction, made of stainless steel.

Other accesories can be added:

- ✓ Optical sensor for objects detecting
- ✓ Print heads holder with 3D adjusting possibilities
- ✓ Documents feeder
- ✓ Guide plate for manual feeding of originals
- ✓ Folding ramp
- ✓ Carrying case for easy transport